


CURRENT 1.0 Ampere
VOLTAGE RANG 20 to 200 Volts

K12 THRU K120

Features:

- ☐ Metal silicon junction, majority carrier conduction
- ☐ For surface mounted applications
- ☐ Low power loss, high efficiency
- ☐ Fast switching for high efficiency
- ☐ High forward surge current capability
- ☐ For use in low voltage, high frequency inverters

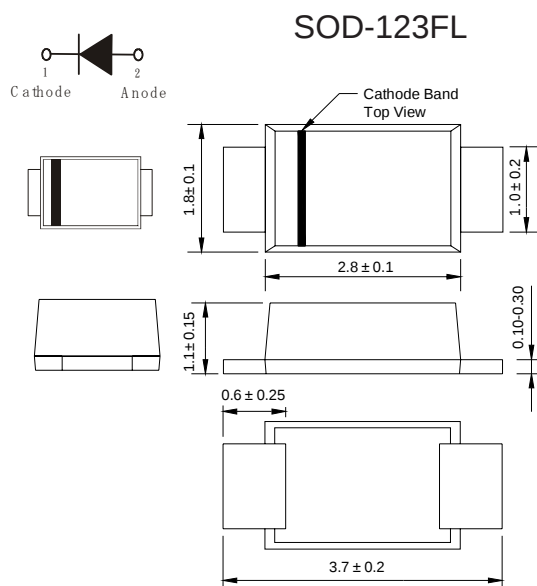

Dimensions in millimeters

Absolute Maximum Ratings* (TA=25°C Unless otherwise noted)

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	K12	K14	K16	K18	K110	K112	K115	K120	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V _{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	1.0								A
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30								A
Max Instantaneous Forward Voltage at 2A	V _F	0.55		0.70	0.85			0.95		V
Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a =100°C	I _R	0.3 10			0.2 5			0.1 2		mA
Typical Junction Capacitance ⁽¹⁾	C _j	220		80						pF
Typical Thermal Resistance ⁽²⁾	R _{θJA}	85								°C/W
Operating Junction Temperature Range	T _j	-55 ~ +125			-55 ~ +150					°C
Storage Temperature Range	T _{stg}	-55 ~ +150								°C

(1) Measured at 1 MHz and applied reverse voltage of 4 VDC

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

CURRENT 1.0 Ampere
VOLTAGE RANG 20 to 200 Volts

K12 THRU K120

Typical Characteristics

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

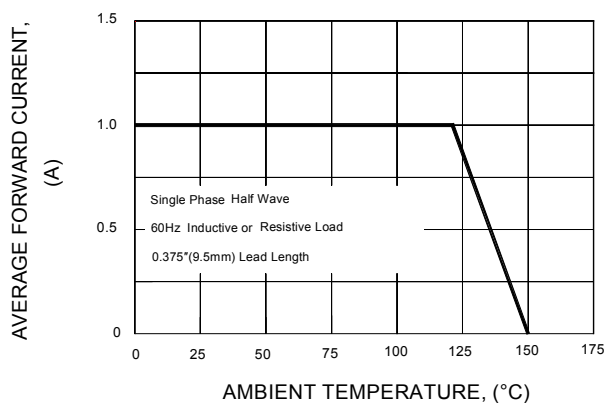


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

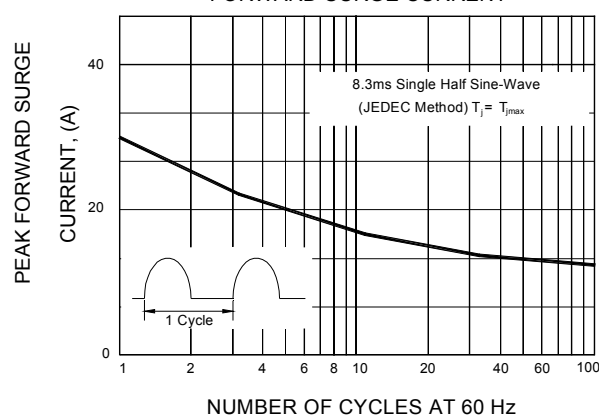


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

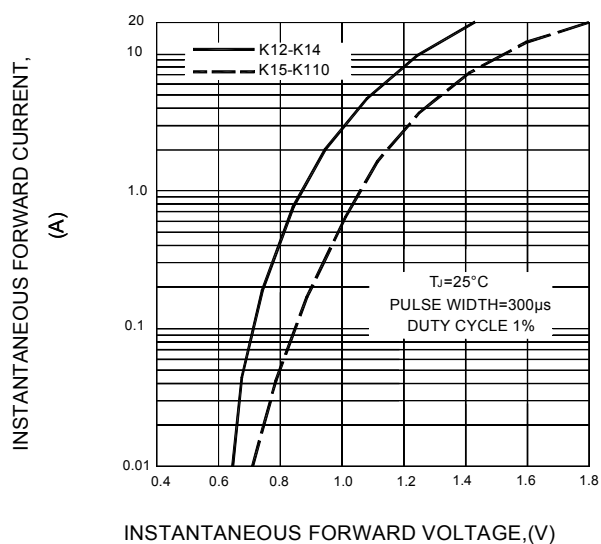


FIG.4-TYPICAL REVERSE CHARACTERISTICS


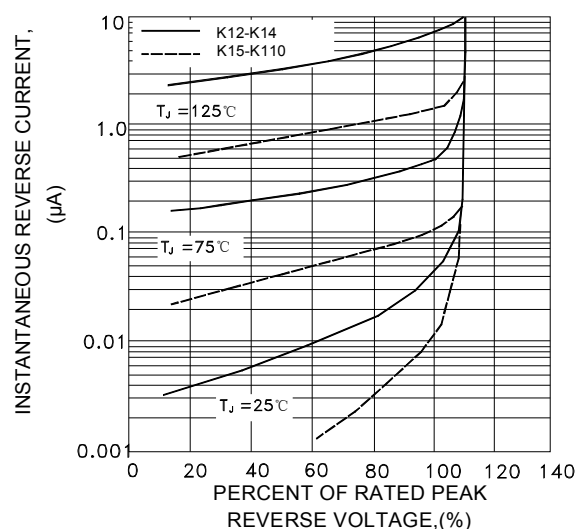


FIG.5-TYPICAL JUNCTION CAPACITANCE

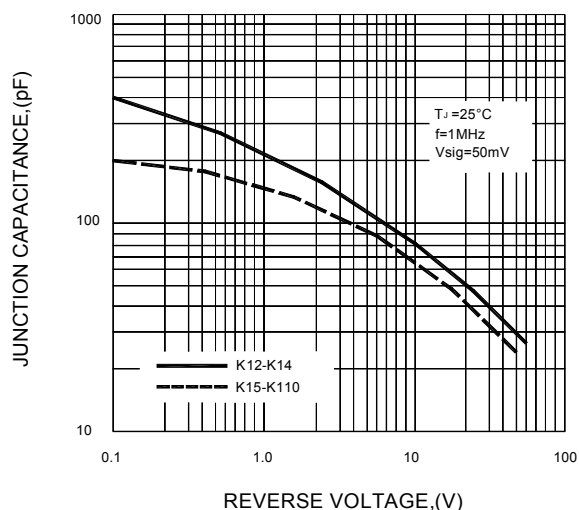


CURRENT 1.0 Ampere
VOLTAGE RANG 20 to 200 Volts

K12 THRU K120

Package Dimension

SOD-123FL

Unit: mm

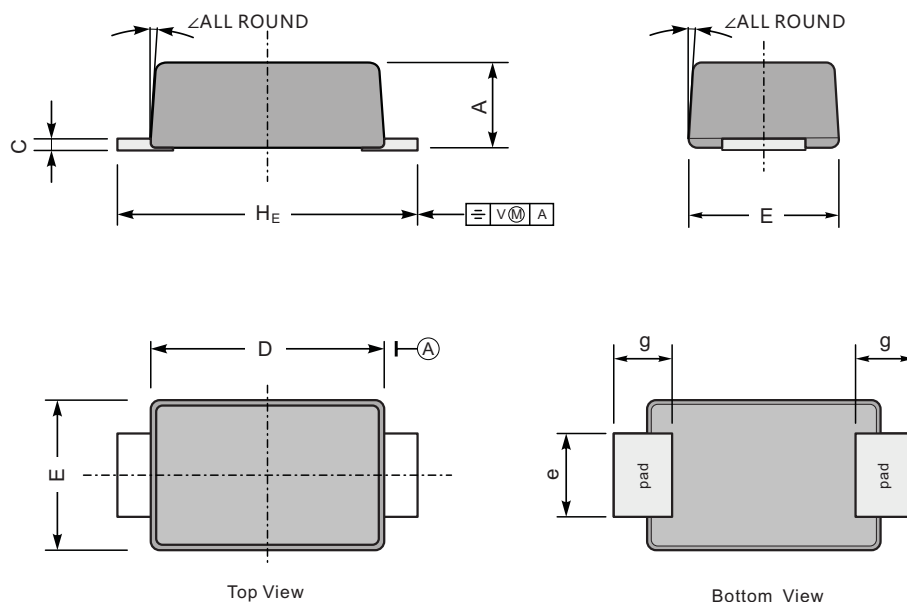

UNIT		A	C	D	E	e	g	H _E	$\angle$
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	

The recommended mounting pad size

